

## Regolo 1 RP13-V








Pendant  
INDIRECT  
Light Distribution



The Regolo RP13 is a nominal 1.5" wide profile, pendant mounted fixture designed for acoustic grid ceilings, sheet rock ceilings and various structural ceilings. The product is ideal for illuminating corridors, open and private offices, classrooms, lobbies and general purpose rooms.

- *Extruded aluminum housing and die cast aluminum end caps*
- *Configure into linear rows, complex patterns and individual geometric shapes*
- *Tool free installation with engineered spring latch design*
- *Intelligent wireless technology inside from premier connected lighting partners*
- *Available in 3 standard paint finishes*

### Standard Individual Fixture Lengths

2' (609 mm)	
3' (914 mm)	
4' (1219 mm)	
5' (1524 mm)	
6' (1828 mm)	
7' (2133 mm)	
8' (2438 mm)	

### ORDERING INFORMATION / Example: RP13-V-O-08-L35-UNV-D-11-WH-T1W120-8


SERIES	DISTRIBUTION	INDIRECT SHIELDING	LUMENS UP	CRI & CCT
<b>RP13</b> - Regolo 1 1.625" Wide, 3.125" Tall, Integral Driver, Pendant Mount	<b>V</b> - Indirect	<b>O</b> - Open <b>DG</b> - Dust Guard <b>BW</b> - Batwing Optic <b>ASYM</b> - Asymmetric Optic	<b>03</b> - 300 lm/ft <b>05</b> - 500 lm/ft <b>08</b> - 800 lm/ft <b>10</b> - 1000 lm/ft <b>13</b> - 1300 lm/ft <b>15</b> - 1500 lm/ft	<b>L</b> - 80 CRI <b>H</b> - 90 CRI <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K

VOLTAGE	DRIVER	CIRCUITING	FINISH
<b>UNV</b> - Universal 120 - 277V <b>120V</b> - 120V <b>277V</b> - 277V	<b>Dimming 0-10V</b> <b>D</b> - Dim to 1% (Standard) <b>D0</b> - Dim to 1%, Fade to Off <b>D02</b> - Eldoled Solodrive, Dim to 0% <b>LUTRON</b> - See options on page 2	<b>Qty of Power Circuits</b> <b>1</b> - 1 Power <b>2</b> - 2 Power <b>Qty of Control Circuits</b> <b>1</b> - 1 Control <b>2</b> - 2 Control <b>Options</b> <b>B10</b> - 10 Watt Battery Pack (CEC Compliant) <b>B15</b> - 15 Watt Battery Pack (CEC Compliant) <b>GTD</b> - Generator Transfer Device (120V or 277V) <b>EM</b> - Dedicated Emergency Circuit	<b>WH</b> - White Painted Finish <b>SV</b> - Silver Painted Finish <b>BK</b> - Black Painted Finish <b>CC</b> - Custom Color


MOUNTING	OPTIONS	LINEAR ROWS	INDIVIDUAL SHAPES
<b>Ceiling Type</b> <b>T1</b> - Aircraft Cable to 1" Grid <b>T9</b> - Aircraft Cable to 9/16" Grid <b>TS</b> - Aircraft Cable to Slotted Grid <b>SR</b> - Aircraft Cable to Structure	<b>LEV</b> - Leviton Integral Sensor <b>WS</b> - Wattstopper (Legrand) Integral Sensor <b>WLX</b> - Wavelinx (Cooper Lighting Solutions) Integral Sensor <b>NX</b> - NX (Hubbel) Integral Sensor <b>NLT</b> - nLight (Acuity Brands) Integral Sensor <b>ATH</b> - Athena (Lutron) Integral Sensor <b>LV</b> - Vive (Lutron) Integral Sensor <b>ENL</b> - Enlighted Integral Sensor <b>CP</b> - Chicago Plenum <b>GLR</b> - Fusing	<b>2</b> - 24" <b>3</b> - 36" <b>4</b> - 48" <b>5</b> - 60" <b>6</b> - 72" <b>7</b> - 84" <b>8</b> - 96" <b>XX</b> - Specify run lengths in 1/8" increments	<b>SQX</b> - X' Square <b>TRX</b> - X' Triangle <b>YX</b> - X' Leg Y-Shape <b>XX</b> - X' Leg X-Shape

## PHOTOMETRICS


\*LUMEN OUTPUT MAY VARY. 3500K / 80 CRI USED FOR RESULTS.



0 - Open			
PACKAGE	Lumens per ft	Watts per ft	Lumens per watt
03	297	1.9	159
05	498	3.1	160
08	809	5.3	153
10	1004	6.4	157
13	1306	8.8	149
15	1496	10.1	148



BW - Batwing Optic			
PACKAGE	Lumens per ft	Watts per ft	Lumens per watt
03	302	2.1	146
05	514	3.5	149
08	801	5.5	147
10	1007	7.1	142
13	1311	9.6	137
15	1510	11	137




ASYM - Asymmetric Optic			
PACKAGE	Lumens per ft	Watts per ft	Lumens per watt
03	295	2.1	143
05	501	3.5	145
08	807	5.7	142
10	1007	7.3	138
13	1303	9.8	133
15	1498	11.3	133

## DRIVER INFORMATION

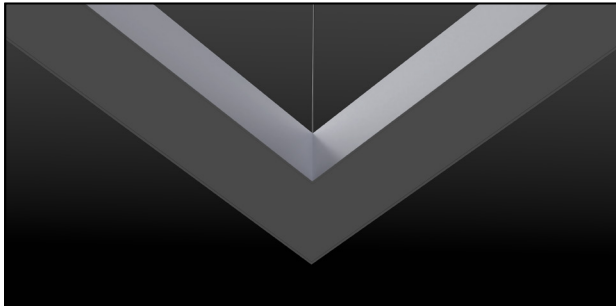NULITE CAT#	DRIVER MANUFACTURER / SERIES	DIMMING / CONTROL PROTOCOL	DIM RANGE	NOTES/ DESCRIPTION
D	Signify Xitanium, Osram OTI	0-10v	100% -1%	Standard Nulite driver, base fixture price
D0	Signify Xitanium, Osram OTI	0-10v	100% - 1% (Steps from 1% to 0% or OFF)	Standard Nulite driver, base fixture price
D02	Eldoed Solodrive	0-10v	100% - 0%	Logarithmic Dimming Curve
L11	Lutron Hi-Lume Premier (PEQ0E) Max lumen package 03	0-10v	100% - 0.1%	Hi-lume Premier 0.1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
L15	Lutron Hi-Lume Series (LDE1)	0-10v	100% - 1%	Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
ELE	Eldoed Ecodrive	DALI	100% - 1%	Logarithmic Dimming Curve
ELS	Eldoed Solodrive	DALI	100% -0%	Logarithmic Dimming Curve

## STANDARD "PATTERN" LAYOUT OPTIONS



**L** **L-Intersection (Corner)**  
Available Standard configurations: 45°, 60°, 90°, 120°, 135°



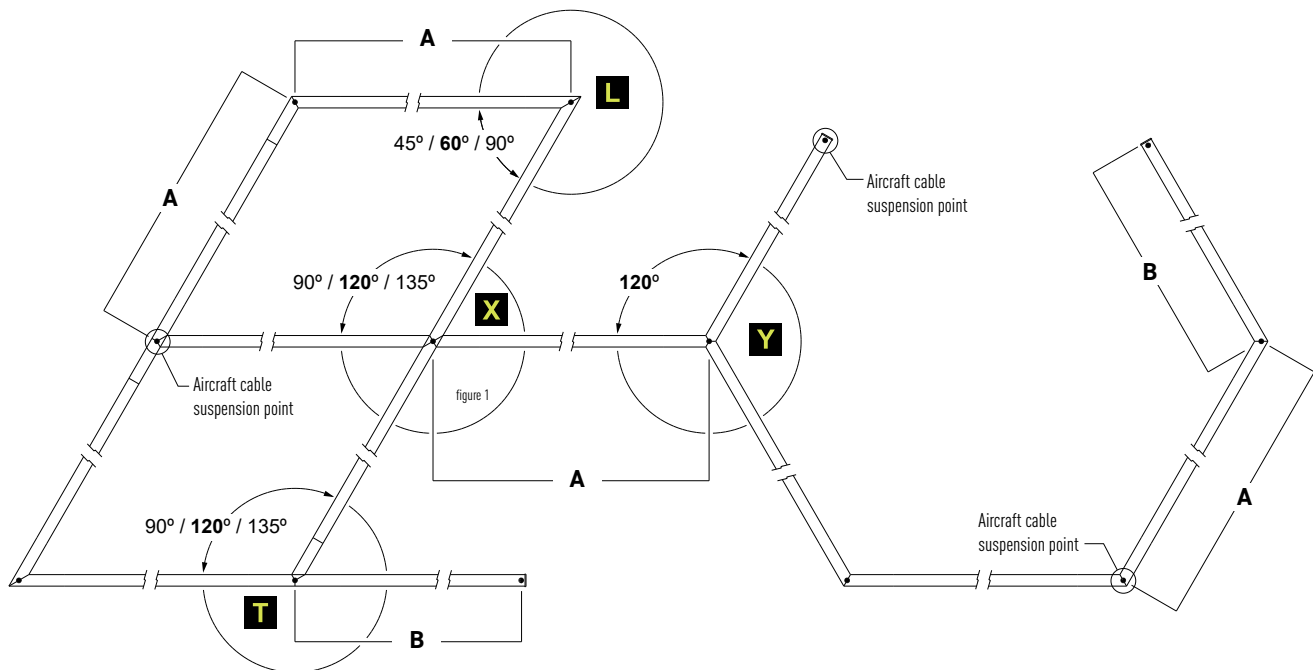
**T** **T-Intersection**  
Available Standard configurations: 45°+135°, 60°+120°, 90°+90°



**Y** **Y-Intersection**  
Available Standard configurations: {3}120°



**X** **X-Intersection**  
Available Standard configurations: {2}45°+135°, {2}60°+120°, {2}90°+90°















Description	Notes
A <b>Linear Section</b> (Intersections on 2 sides)	Specify distance between aircraft cable suspension points in 1' (305mm) increments from 2' (610mm) to essentially any length.
B <b>Linear Section</b> (Intersection on 1 side)	Specify distance between aircraft cable suspension points in 1' (305mm) increments from 2' (610mm) to essentially any length, then subtract 1/2" (13mm)

**STANDARD INDIVIDUAL SHAPES**

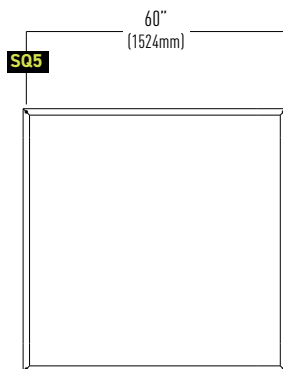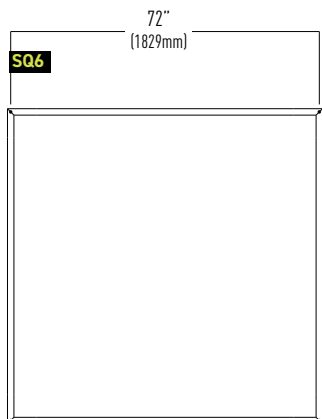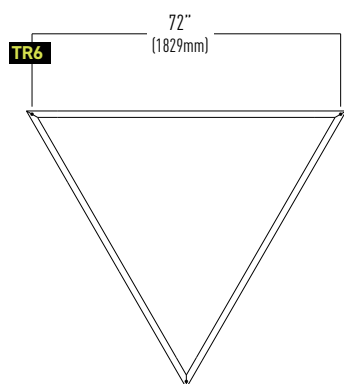The Regolo1 is available in an array of individual fixture shapes that ship fully assembled as and individual unit.

**Ordering Example:** RP13-V-0-08-L35-UNV-D-11-WH-T1W120-8-**SQ4**

**Squares**

**Triangles**

**Y Shape**

**X Shape**


## PRODUCT SPECIFICATIONS AND INFORMATION

### HOUSING CONSTRUCTION

Fixture body is constructed out of powder coat painted extruded aluminum with die cast aluminum powder coat painted end caps. Captive joining mechanism is a combination die formed sheet metal and zinc plated spring steel. All hardware is stainless steel.

### LEDs AND OPTICAL SYSTEM

Optical systems consist of a single row of mid power constant current LEDs mounted to a removable highly reflective powder coated metal reflector.

### STANDARD DIMMING LED DRIVERS

Standard constant current integral electronic 0-10v dimming input. Two standard driver options are available. Option **D** dims to 1% and option **DO** dims to 0% or OFF (the final 1 percent is a "step"). Both options are the same price and representative of the base fixture price. Options **D** and **DO** ship with 5 wires (Line Voltage- Black and White wires, Low Voltage- Purple and Pink wires, Ground- Green wire).

### DALI DRIVERS

Standard constant current DALI drivers available in either a dim to 1% (**ELE**) or dim to 0% (**ELS**). DALI fixtures ship with 5 wires (Line Voltage- Black and White wires, Low Voltage- Purple and Pink wires, Ground- Green wire)

### LIGHT OUTPUT

Standard factory set light outputs are programmed to within +/- 5% of the nominal light level at 3500K 80 CRI LEDs. Light output, wattage, and efficacy will vary across different CRI's CCT's. Refer to ies files on the website for actual detailed lighting performance data.

### CIRCUITING

Each luminaire may have up to 2 line voltage (Power) circuits and 2 low voltage (Control) circuits. Two power circuits are required for independent control of uplight and downlight in bi-direct luminaires, and low voltage control circuits are for independent dimming of each circuit.

#### Examples:

- **"1-1"** - 1 power circuit (Line Voltage) and 1 control circuit (Low Voltage) > 5 wires total (1 Black Wire "Hot", 1 White Wire "Neutral", 1 Green Wire "Ground", and 2 low voltage control wires, 1 Pink wire and 1 Purple wire)
- **"2-2"** - 2 power circuits (Line Voltage) and 1 control circuit (Low Voltage) > 9 wires total (2 Black Wires "Hot", 2 White Wires "Neutral", 1 Green Wire "Ground", and 4 low voltage control wires, 2 Pink wires and 2 Purple wires)

### BATTERY PACKS

Recyclable Ni-Cad battery pack, battery run time is 90 minutes. Recharge time of 24 hours. Battery packs up to 15W are available. To calculate Battery Lumen Output, multiply luminaire efficacy by battery wattage. [example: 120 lms/watt (**120**) x **B10** Battery Wattage (**10**) = **1200** lumens of egress illumination for 90 minutes.] Battery option not available in fixtures less than 4', and other limitations apply, consult factory. Entire "direct" fixture housing is energized by battery for lengths up to 5'. Half of direct fixture is energized by battery for 6' - 8' housing lengths. Emergency or night light circuit available (requires additional power circuit). Battery fixtures ship with an additional Orange "constant hot" wire.

### LUMEN MAINTENANCE

90% of initial light output (L90) at 100,000+ hours, 70% of initial light output (L70) at 200,000+ hours calculated.

### GENERATOR TRANSFER DEVICES

The GTD emergency lighting control device senses the loss of normal power and switches the AC driver input power connection to an unswitched, generator (or central inverter) supplied lighting circuit. GTD fixtures ship with 3 additional wires (Orange wire "constant hot", Black-Red wire "generator hot", White-Red wire "generator neutral").

### FIXTURE FINISHES

Standard finish is powder coat painted white (**WH**), black (**B**) or silver (**S**). Consult factory for custom color (**CC**) finishes.

### INSTALLATION AND MOUNTING

Pendant luminaires mount to Acoustical Grid Ceilings (**T1,T9,TS**), and Various Structural Ceilings (**SR**). The product is suspended with adjustable aircraft cable up to 240" from ceiling surface. Luminaires may be individually mounted or continuously mounted in linear configurations or complex geometric patterns. Refer to data sheets and installation instructions for details on fixture dimensions, mounting location dimensions and available luminaire configurations.

### WARRANTY

5-year limited warranty on LED and driver from date of shipment. Refer to the full warranty details on <https://nulite.lighting/products/rp13-indirect>.

### WEIGHT

Fixtures are approximately 1.5 lbs/ft, Driver box weights vary per enclosure type and electrical configuration, consult factory.

### APPROVALS

ETL listed, conforms to UL Standard 1598 and CSA Standard C22.2, indoor dry/damp locations.

### TESTING AND CERTIFICATION

All of Nulite's LED components have been tested under **LM-80** guidelines insuring 6000 hours of luminous flux data. Additionally Nulite can supply **LM-79** data on all luminaires. This data includes luminous flux, electrical power, efficiency, chromaticity as well as the diffusion of luminous intensity.