
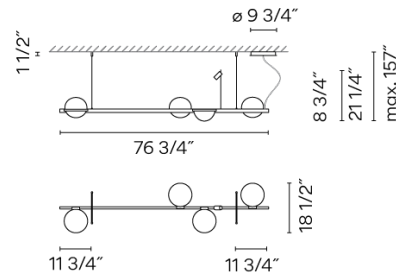


Spec sheet

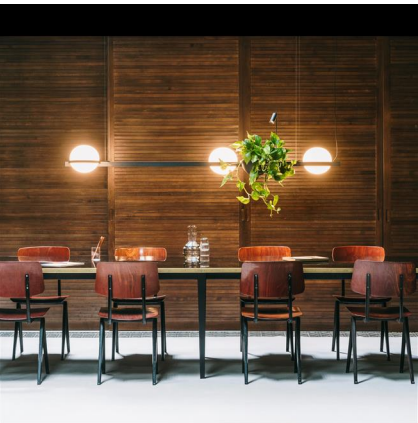

Optional: Extra cable length
Min. Quantity, upcharge and extra lead time apply

Finish	18 Graphite ADAPTA RF 9913 WX
LED color temperature	2700 K
Dimming	0-10V / LUTRON / DALI
Installation type	Surface
Materials	Profile: Aluminum Canopy: Steel Flowerpot: PMMA (thermoplastic polyme
Light source	6 x LED 4.6W 500mA 1 x LED 2W 500mA
LED	CRI>90 2742 lm 49.57 2700 K
Driver	Constant Current 500 120~277 V V 50~60 Hz HZ
Remarks	Plants not included Title 24 (JA8) compliant Cable can be adjusted in the field. 157 max.
	Dimmable LED IP20 Multi-volt Dry Location 50-60Hz 0-10V
Application	Pendants
Packaging	1 Box 85.43 m x 12.99 m x 12.2 m Gross weight 27.07 Net weight 17.97 Vol. 7.8364



Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

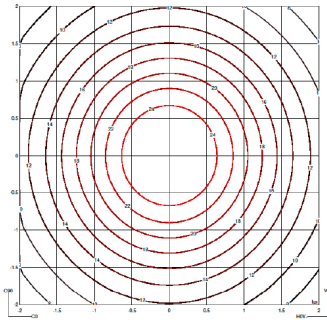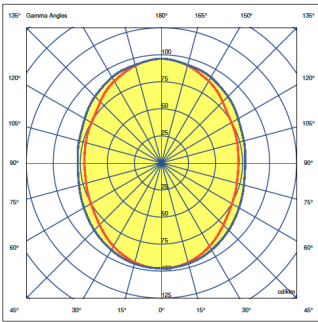

Efficiency	100%
Coordination System	CG
Total Flux	1729 lm
Maximum Value	97.46 cd/klm