

Minude Semi-Recessed Adjustable 1.8 1x DE


Overview



Adding a touch of minimalistic elegance is easy when you have Minude Semi-Recessed. A small cylinder, a deep-recessed light source, a long list of anodized colors and impressive flexibility. On walls or ceilings, with nothing but a small, circular plate hiding the installation hole.


How to Specify (example)

1. Select Luminaire / Body → Page 2




Example: **MINUD-SR-A-1.8-1X-30M-DP-DE-SBBA**
Minude Adjustable 1.8 1x, 3000K, medium, damp rated, silver bronze brushed

2. Select Remote Driver → Page 3



Example: **NON-IC-RD-DP-010P-350-8**
Remote Driver, NON-IC rated, damp rated, 0-10V, ELV & Triac, 350mA, 8W

3. Select Mounting Accessory (optional) → Page 4



Example: **BP-C-44-MINUDE-ADJ-BLS**
Backplate Cover, for 4"x4" octagonal junction box, Minude Adjustable 1.8, black structure


Example order:

Quantity	Item
1	MINUD-SR-A-1.8-1X-30M-DP-DE-SBBA
1	NON-IC-RD-DP-010P-350-8
1	BP-C-44-MINUDE-ADJ-BLS


Minude Semi-Recessed Adjustable 1.8 1x DE

Luminaire Specifications

- Aperture: 1.7"
- Adjustability: 360° x 90°
- Ceiling / wall cutout: Ø1 9/16"
- Body material: aluminum
- Body finish: chrome plating, powder coat, wet paint or anodisation
- Cast grey finish is slightly see-through and can still show natural color differences of the raw aluminum material
- Canopy material: steel
- Canopy finish: black powder coat, unless white is selected (then it is white powder coat)
- Stem is always black
- Can be installed on a ceiling or wall
- Driver: not included in the body
- Must be combined with remote driver (specify on page 3)
- Included: connection box for installation without junction box
- Included: plaster finish plate for installation with a 4"x4" octagonal junction box
- Can optionally be combined with Backplate to cover the junction box (specify on page 4)



Minude Adjustable 1.8 1x DE

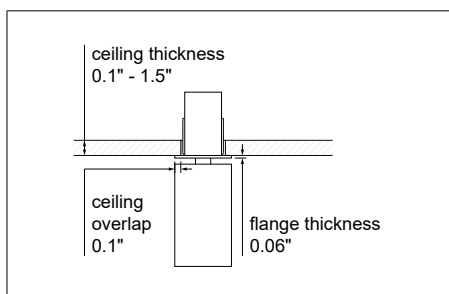

Flange Information


Finish Information




Black Chrome (BLCR)
Plating (Glossy)




Black Structure (BLS)
Powder Coat (Matte)




White Structure (WHS)
Powder Coat (Matte)



Cast Grey (CGMT)
Wet Paint (Matte)



Black (BLBA)
Anodised (Brushed)



Bronze (BRBA)
Anodised (Brushed)



Champagne (CHBA)
Anodised (Brushed)



Silver Bronze (SBBA)
Anodised (Brushed)


Ordering Information

MINUD-SR-A-1.8-1X		-		-	DP	-	DE	-		
MINUD-SR-A-1.8-1X	Minude Adjustable 1.8 1x	27	2700K	S	Spot (16°)	DP	Damp Location (indoor use only)		BLCR	Black Chrome
		30	3000K	M	Medium (29°)				BLS	Black Structure
		35	3500K						WHS	White Structure
									CGMT	Cast Grey
									BLBA	Black Brushed
									BRBA	Bronze Brushed
									CHBA	Champagne Brushed
									SBBA	Silver Bronze Brushed

Minude Semi-Recessed Adjustable 1.8 1x DE

Remote Driver Specifications

- Material: sheet metal (galvanized steel)
- Class 2 constant current power supply
- Multiple luminaires can be connected in series to a single driver
- Box can be bottom, side or t-bar mounted
- 4 knockout holes for line voltage conduit or cable connection
- 4 knockout holes for low-voltage conduit or cable connection
- May be placed up to 50ft away using 16AWG wire
- Suitable for damp locations



Remote Driver "A"

Remote Driver Specifications & Ordering Information

Ordering Code	Version	Input	Output	Dim ⁽²⁾	Driver Location					Luminaires ⁽³⁾	
					Recessed IC	Recessed Non-IC	Surface	Cabinet	Under Cabinet	Fixed CCT (Spot)	Fixed CCT (Medium)
IC-RD-DP-D-ELDO-1-350-10	Remote Driver "A"	120-277VAC	350mA	DALI-2 - 1%	☑	☒	☑	☑	☑	1 - 2	1
IC-RD-DP-D-ELDO-1-350-20	Remote Driver "A"	120-277VAC	350mA	DALI-2 - 1%	☑	☒	☑	☑	☑	1 - 4	1 - 3
IC-RD-DP-D-ELDO-1-350-30	Remote Driver "A"	120-277VAC	350mA	DALI-2 - 1%	☑	☒	☑	☑	☑	1 - 4	1 - 3
IC-RD-DP-0101-EL-350-10	Remote Driver "A"	120-277VAC	350mA	0-10V - 1%	☑	☒	☑	☑	☑	1 - 2	1
IC-RD-DP-0101-EL-350-20	Remote Driver "A"	120-277VAC	350mA	0-10V - 1%	☑	☒	☑	☑	☑	1 - 4	1 - 3
IC-RD-DP-0101-EL-350-30	Remote Driver "A"	120-277VAC	350mA	0-10V - 1%	☑	☒	☑	☑	☑	1 - 4	1 - 3
NON-IC-RD-DP-010P-350-8	Remote Driver "A"	120-277VAC ⁽¹⁾	350mA	0-10V, ELV & Triac - 1%	☒	☑	☑	☑	☑		1
NON-IC-RD-DP-010P-350-11	Remote Driver "A"	120-277VAC ⁽¹⁾	350mA	0-10V, ELV & Triac - 1%	☒	☑	☑	☑	☑	2	
NON-IC-RD-DP-010P-350-14	Remote Driver "A"	120-277VAC ⁽¹⁾	350mA	0-10V, ELV & Triac - 1%	☒	☑	☑	☑	☑	3	2
IC-RD-DP-D-ELDO-1-500-10	Remote Driver "A"	120-277VAC	500mA	DALI-2 - 1%	☑	☒	☑	☑	☑	1	1
IC-RD-DP-D-ELDO-1-500-20	Remote Driver "A"	120-277VAC	500mA	DALI-2 - 1%	☑	☒	☑	☑	☑	1 - 3	1 - 2
IC-RD-DP-D-ELDO-1-500-30	Remote Driver "A"	120-277VAC	500mA	DALI-2 - 1%	☑	☒	☑	☑	☑	1 - 4	1 - 2
IC-RD-DP-0101-EL-500-10	Remote Driver "A"	120-277VAC	500mA	0-10V - 1%	☑	☒	☑	☑	☑	1	1
IC-RD-DP-0101-EL-500-20	Remote Driver "A"	120-277VAC	500mA	0-10V - 1%	☑	☒	☑	☑	☑	1 - 3	1 - 2
IC-RD-DP-0101-EL-500-30	Remote Driver "A"	120-277VAC	500mA	0-10V - 1%	☑	☒	☑	☑	☑	1 - 4	1 - 2
IC-RD-DP-TE1-500-12	Remote Driver "A"	120VAC	500mA	ELV & Triac - 1%	☑	☒	☑	☑	☑		1
IC-RD-DP-TE1-500-20	Remote Driver "A"	120VAC	500mA	ELV & Triac - 1%	☑	☒	☑	☑	☑	3	2
NON-IC-RD-DP-010P-500-16	Remote Driver "A"	120-277VAC ⁽¹⁾	500mA	0-10V, ELV & Triac - 1%	☒	☑	☑	☑	☑	2	
NON-IC-RD-DP-010P-500-21	Remote Driver "A"	120-277VAC ⁽¹⁾	500mA	0-10V, ELV & Triac - 1%	☒	☑	☑	☑	☑	3	2

⁽¹⁾ Dimming via ELV & Triac only compatible at 120VAC input

⁽²⁾ Consult the factory for dimmer compatibility

⁽³⁾ Minimum & maximum amount of compatible luminaires, multiple luminaires must be connected in series to a single driver

Minude Semi-Recessed Adjustable 1.8 1x DE


Mounting Accessories Specifications

Plaster Finish Plate


- Always included with the luminaire
- An additional Plaster Plate can be ordered, to be delivered in advance

Backplate

- Optional
- Covers a 4"x4" octagonal junction box
- Material: stainless steel
- Finish: powder coat
- Thickness: 0.08"
- Weight: 0.7lbs



Plaster Plate Minude Adjustable 1.8




Backplate Minude Adjustable 1.8

Finish Information



Black Structure (BLS)
Powder Coat (Matte)



White Structure (WHS)
Powder Coat (Matte)

Ordering Information

PP	-	44	-	MINUDE-1.8
PP Plaster Finish Plate		44 For 4"x4" octagonal junction box		MINUDE-1.8 Minude Adjustable 1.8

BP-C	-	44	-	MINUDE-ADJ	-	
BP-C Backplate Cover		44 For 4"x4" octagonal junction box		MINUDE-ADJ Minude Adjustable 1.8		BLS Black Structure WHS White Structure

Minude Semi-Recessed Adjustable 1.8 1x DE



Performance Specifications

Luminaire	Fixed CCT (Spot)	Fixed CCT (Medium)
Weight	0.8lbs	0.8lbs
Adjustability	360° x 90°	360° x 90°
Cut-Out Size	Ø1 9/16"	Ø1 9/16"
Location	damp (indoor use only)	damp (indoor use only)
IP Rating	IP20	IP20
CRI*	93, R9: 57	92, R9: 71
Lifetime	L90 B10 @ 50,000 hrs	L80 B20 @ 50,000 hrs
UGR	see website	see website

Electrical (typical)	Fixed CCT (Spot)		Fixed CCT (Medium)	
Drive Current (mA DC)	350	500	350	500
Forward Voltage (V)	11.7	12.2	16.4	16.9
LED Power (W)**	4.1	6.1	5.7	8.5

* CRI & TM-30 Value for 3000K

** Power figures exclude remote driver

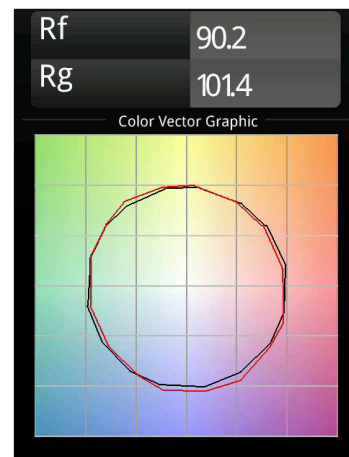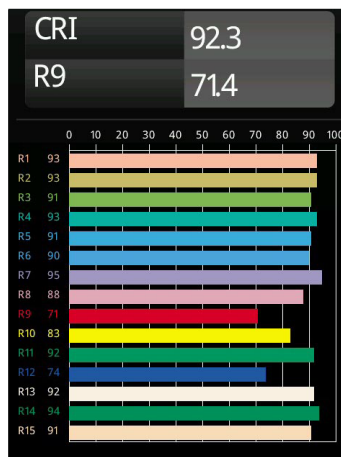

For photometric files see website or contact factory.

Output Specifications

Reference Delivered Lumens	CCT	Optics	Drive Current	Finish
610 (ref. 3000K, M, 500mA, WHS)	2700K (0.98) 3000K (1.00) 3500K (1.06)	S (0.46) M (1.00)	350mA (0.74) 500mA (1.00)	BLCR (0.97) BLS (0.97) WHS (1.00) CGMT (1.07) BLBA (0.98) BRBA (0.99) CHBA (1.01) SBBA (1.00)

Multipliers are indicated between brackets: ()

Example calculation, to determine typical output for 2700K, Medium, 350mA, Black Structure: 610 x (0.98) x (1.00) x (0.74) x (0.97) = 429 lumens

Listings and Certifications

- Listed: cULus
- Damp locations (indoor use only)



Warranty

- Visit <https://www.supermodular.com/en-us/warranty/>