



AERIS

CHANDELIER

Inspired by the ethereal beauty of clouds, AERIS embodies softness and lightness through the repetition of sculptural forms, crafting an ethereal centerpiece. Each mouth blown glass cloud is paired with architecturally crafted brass bars that cross and lightly kiss together, evoking a sense of weightlessness—as if suspended in air.

The duality of the brass structural element defines each piece, with dual vertical drops playfully interacting with horizontal crossings, creating a unity to the entire fixture.


AVAILABLE FINISHES




TECHNICAL

MATERIAL	TREATED BRASS, GLASS		DRIVER SIZE	
FINISH	ALL BRASS FRAMES ARE BRUSHED AND TREATED TO ACHIEVE THE AVAILABLE FINISH OPTIONS, THEN SEALED TO PREVENT ACCELERATED AGING.		220-240V PHASE	AE104 L101 X W49 X H29 / L4" X W2" X H1.1"
				AE112 L130 X W68 X H31 / L5.1" X W2.7" X H1.2"
			220-240V DALI	AE104 L97 X W43X H30 / L3.8" X W1.7" X H1.2"
LAMPING	SELV 60V (EXTERNAL DRIVER SUPPLIED) AE104 10.8W, 1,300LM, 2700K AE112 32.4W, 4,200LM, 2700K			AE112 L97 X W43X H30 / L3.8" X W1.7" X H1.2"
			110-120V TRIAC	AE104 L88 X W43 X H26.5 / L3.5" X W1.7" X H1"
				AE112 L121 X W44 X H26.5 / L4.8" X W1.7" X H1"
DIMMING	WATTAGE AND LUMEN OUTPUT WILL VARY SLIGHTLY DEPENDING ON CONSTANT CURRENT OUTPUT.		110-120V DALI	AE104 L88 X W43 X H26.5 / L3.5" X W1.7" X H1"
				AE112 L121 X W44 X H26.5 / L4.8" X W1.7" X H1"
			SKU CODES	
	220-240V REGION			
	PHASE	DIMMING RANGE 5 - 100%		
	DALI	DIMMING RANGE 1 - 100%	AE104.G-XXX.BR-XXX	AERIS 104 CHANDELIER
			AE112.G-XXX.BR-XXX	AERIS 112 CHANDELIER
	110-120V REGION			
	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS.		GLASS	
			FROSTED BLACK (G-FBL)	
			BLACK (G-BLK)	
			WHITE (G-WHT)	
			CLEAR (G-CLR)	
	FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.		FRAME	
			BRUSHED BRASS (BR-NAT)	
			BLACKENED BRASS (BR-BLK)	
			BRONZED BRASS (BR-BRZ)	
LED LIFESPAN	50,000 HRS			
IP RATING	IP20 - FOR INDOOR USE ONLY		PRODUCT WEIGHT	AE104 12KG / 26.5LB
				AE112 32KG / 70.5LB
CERTIFICATION	AU/NZ	AS/NZS 60598.1, 60598.2.1	PACKAGE WEIGHT	AE104 14KG / 31LB
	EU	EN 60598.1, 60598.2.1		AE112 35KG / 77LB
	US/CAN	ETL/UL CERTIFICATION PENDING		
CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE		PACKAGE SIZE	AE104 1 X L 620 W 620 H 320 / L 24.4" W 24.4" H 12.6"
				AE112 1 X L 1220 W 620 H 420 / L 48" W 24.4" H 16.5"

DIMENSIONS

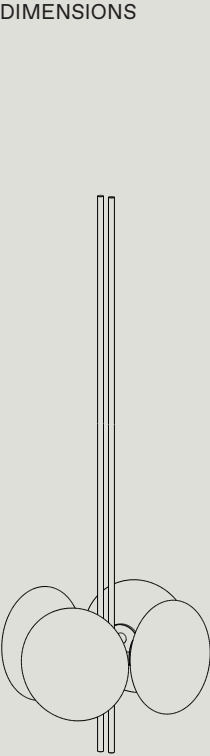

AE104  
L 460 W 460 H 350  
L 18.1" W 18.1" H 13.8"  
MIN DROP HEIGHT - H 600 / 23.6"

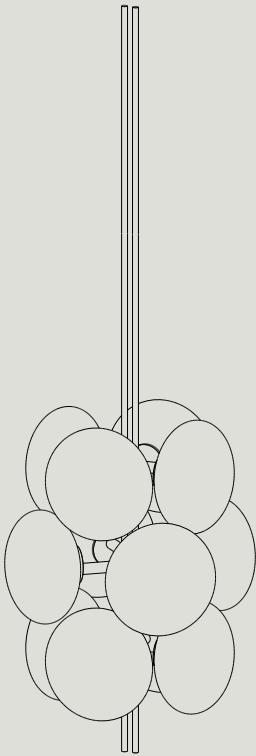

AE112  
L 550 W 550 H 740  
L 21.7" W 21.7" H 29.1"  
MIN DROP HEIGHT - H 1,000 / 39.4"

\*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION.  
\*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED, THE SLIM CANOPY (NON US/CAN REGION) OR LARGE CANOPY (US/CAN) WILL BE SUPPLIED.

		
SLIM Ø14MM DOUBLE CANOPY CAN.SL.F14.XX-XXX	PUCK Ø14MM DOUBLE CANOPY CAN.PK.D14.XX-XXX	LARGE Ø14MM DOUBLE CANOPY CAN.ST.170.F14.XX-XXX
Ø120 X 7MM / 4.7" X 0.3"	Ø50 X 65MM / 2" X 2.6"	Ø170 X 40MM / 6.7" X 1.6"
DRIVER HOUSED IN CEILING OR JUNCTION BOX	DRIVER HOUSED IN CEILING	DRIVER HOUSED IN CANOPY

TECHNICAL

MATERIAL	TREATED BRASS
	<div><div> BRUSHED BRASS</div><div> BLACKENED BRASS</div><div> BRONZED BRASS</div></div>
CANOPY FINISH	BRUSHED BRASS (BR-NAT) BLACKENED BRASS (BR-BLK) BRONZED BRASS (BR-BRZ)
SKU CODES	EG. CAN.SL.D14.BR-BLK = SLIM DOUBLE CANOPY IN BLACKENED BRASS FINISH