




TECHNICAL | THIN Multiples Dyad (Vertical)

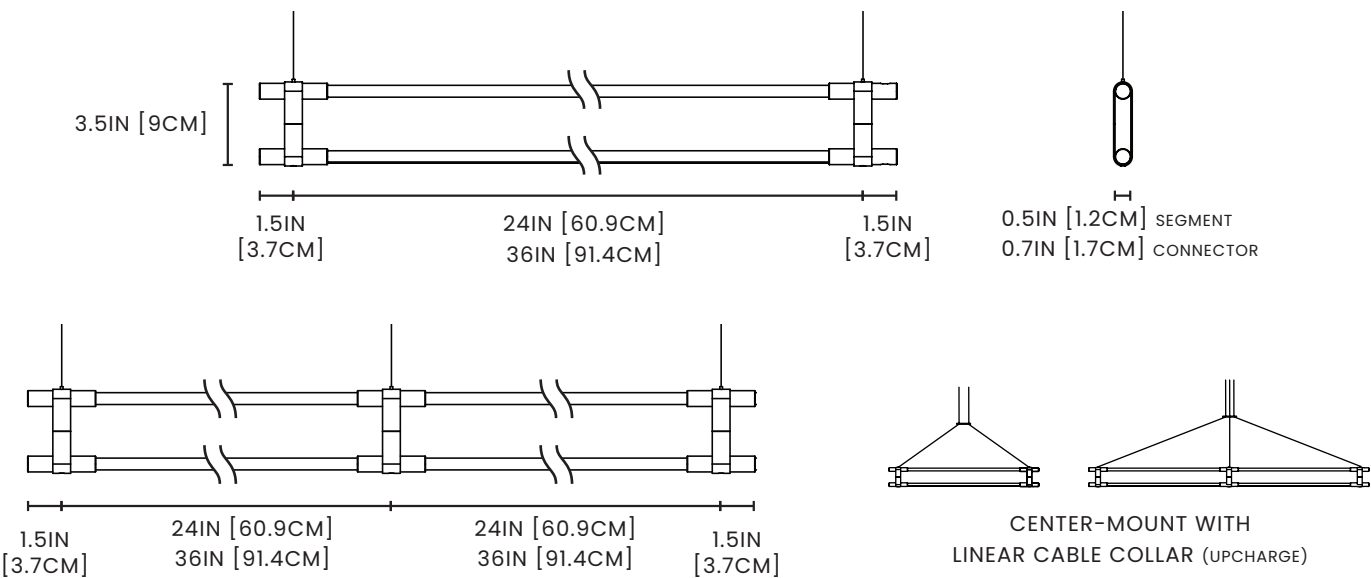


24IN AND 36IN LIGHT SEGMENTS MAY BE COMBINED IN THE SAME FIXTURE  
STANDARD MAX LENGTH PER FIXTURE IS (3) 36" LIGHT SEGMENTS 110.8IN [281.5CM]  
FOR LONGER RUNS, PLEASE CONTACT US




FROSTED LENS  
90° BEAM ANGLE




LOCAL CANOPY  
7IN DIA X 2IN OR  
12.5IN DIA X 2IN  
(FOR >54W)



JUNCTION BOX  
COVER PLATE  
5IN DIA X 0.5IN



MINI CANOPY  
(OPTIONAL)  
1.25IN DIA X  
1.125IN



CABLE COLLAR  
(OPTIONAL)  
3.25IN X 0.75IN

ILLUMINATION

CRI 95+, R9 90+ standard  
2700K, 3000K, 3500K, 4000K options

**24" segment** 1200LM delivered / 13.6W  
**36" segment** 1840LM delivered / 19.2W  
90LM/W with clear acrylic lens  
50,000 hrs LED life L80

POWER

24VDC output Class 2 constant  
voltage power supply  
120VAC input voltage  
Contact Juniper for alternate inputs

FINISHES

Satin Brass, Black Oxide, Satin Nickel

MATERIALS

Solid brass, PMMA

DIMMING

2-Wire/TRIAC/Forward Phase  
0-10V  
3-Wire  
See Power Supply section for details  
Contact Juniper for alternate  
requirements

MOUNTING

10ft 1/16" aircraft cable, field  
adjustable  
16ft Clear-jacketed 22AWG co-axial  
silver cord, field adjustable  
Direct-mounting and center-  
mounting with Linear Cable Collar  
options available (for up to 2  
connected segments)

SYSTEM RUN

Limited by power supply wattage only

BUILD A SPECIFICATION | THIN Multiples Dyad (Vertical)

| SERIES   | FINISH | CONFIGURATION | SEGMENTS | COLOR TEMP | MOUNTING |
|----------|--------|---------------|----------|------------|----------|
| JPR-THES | - 0    | - M D V       | -        | - F        | -        |

SAMPLE SKU: JPR-THES-01-MDV-333-30-F-R-DM  
Satin Brass, (3) 36" segments, 3000K, frosted lens, remote power  
supply, direct-mount to ceiling

CODE DEFINITIONS

FINISHES



01 Satin Brass 02 Black Oxide 03 Satin Nickel 40 Bronze

SEGMENTS

- 0 no segment
- 2 24 inch segment - 1200LM delivered / 13.6W
- 3 36 inch segment - 1840LM delivered / 19.2W

Each digit represents a single segment, e.g. 000023 is (1)  
24" segment and (1) 36" segment. Contact Juniper for  
custom segment lengths.

COLOR TEMPERATURE

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

LENS

F Frosted - 90° beam angle

MOUNTING

- CX Center-Mount to Canopy without Cable Collar  
Includes corresponding canopy
- CC Center-Mount to Canopy with Cable Collar (upcharge)  
Includes corresponding canopy
- DM Direct-Mount to Junction Box (Local or Remote)  
Includes corresponding canopy for a single power  
cord with ceiling grippers for other mounting points
- MM 2" Mini Mount | Direct-Mount to Ceiling (Remote Only)  
Includes corresponding canopy for a single power  
cord with ceiling grippers for other mounting points

|         |      |
|---------|------|
| Project | Type |
| Notes   |      |