


BCR Ltd. UK
TECHNICAL DATA SHEET
BCR ALUMINIUM SKIRTING

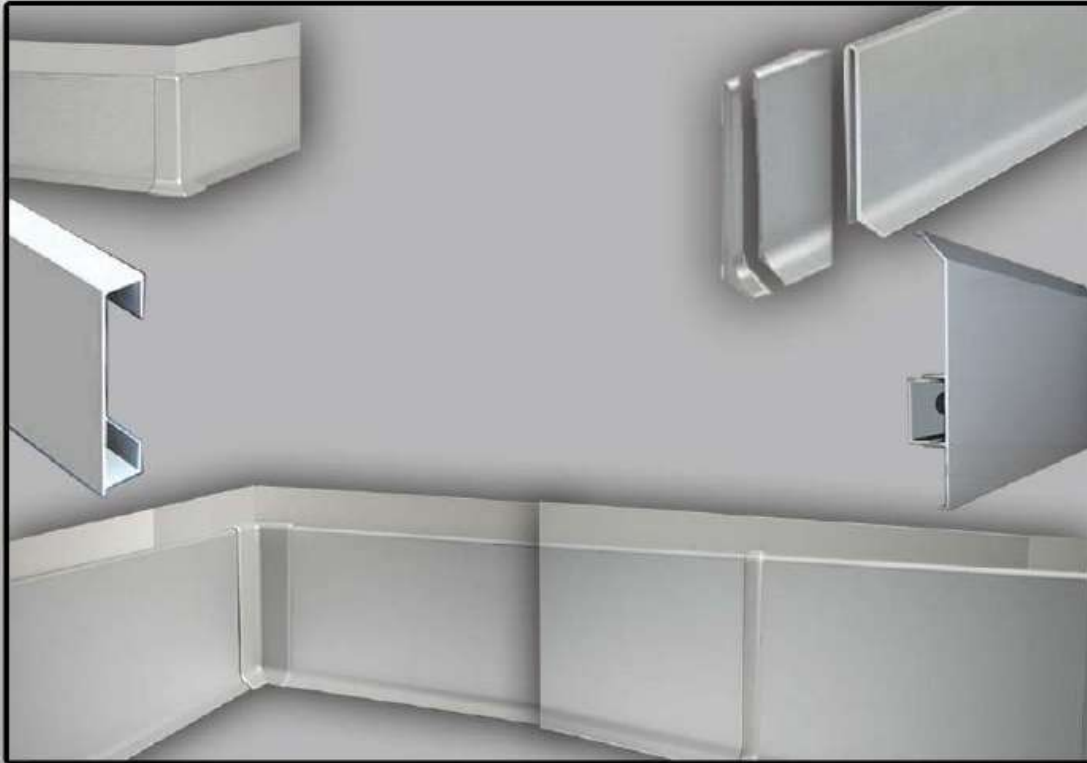

ber

The legendary

BCR ALUMINIUM SKIRTING

DISCRIPTION

BCR Aluminium skirting for protection and decoration between wall & floor.
Aluminium skirting is extruded from 6063 grade aluminium with grey anodised finished.
Extruded aluminium skirting gives dimensional stability precise gauging and uniform height.
Asthetic flooring designs are enhanced by using aluminium skirting.
Aluminium sit on skirting are neat, clean, finish and easily cleaned, used for retail areas and offices.
Available in 2.5 mtr length with connectors for all type of joints.

FIXING


With liquid nail adhesive.

COLOUR

Anodisation available in silver, gold, black and bronze.

SIZES

50 mm, 80 mm & 100 mm.

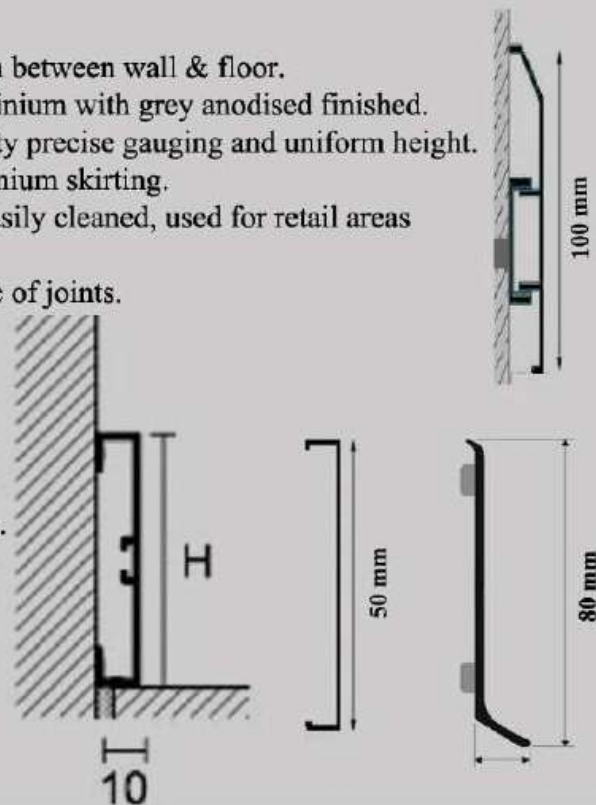

BAHRAIN DISTRIBUTOR:
ALLIED GULF CONSTRUCTION SERVICES
info@alliedgulf.me | www.alliedgulf.me | +973-17791317

/agcs.bahrain

BCR Ltd. UK[®] BCR RUBBER SKIRTING



BCR Rubber Skirting is a blended natural and EPDM rubber strip designed for use as a sealing skirting. The Natural Skirting Rubber physical properties create a strong seal once adjusted and gives a visible decorative line.

BCR Rubber Skirting Sheet can be ready for easy installation. Its black colour, fire resistance, high mechanical properties & surface finish, its anti slip surface finish & its anti-static specially to be used in electrical rooms.

BCR Rubber Skirting can be used in any application where a flexible and durable long-lasting seal is required. It is better in quality to standard skirting and offers a greater longevity in most applications.

BCR Rubber Skirtings for floor circumference borders.

These installation guidelines apply to the BCR Skirting profiles:

The sit-on skirting should be allowed to acclimatize for few hours prior to installation at an ambient temperature of 180° Celsius. Sit-on skirtings are installed after the floorcovering has been fitted.

- 1. It should be ensured that all surfaces to which the profile is to be fixed are sound, dry, flat and free from any contaminants. Wall surfaces should be free from any previous coverings, linings or adhesive residues used to fix them. Paint films and any mould must be removed and the affected surface treated correctly.*
- 2. Using a piece of skirting as a gauging template, place in position and use a pencil to mark the wall to provide a guideline for adhesive application.*
- 3. All internal and external corners should be mitre cut.*
- 4. Apply one of the recommended adhesives listed below and follow the manufacturer's instructions for application. The adhesive is applied only to that section of the wall where the vertical face of the sit-on skirting will be bonded, not to the foot of the skirting or flooring.*
- 5. Bring both surfaces together and apply even pressure along the skirting ensuring any air bubbles are removed and full contact is made with the wall. Recommended adhesive products for EPDM skirtings*
We provide this information only as guidance and the legal responsibility for the supply and performance of the adhesives listed below shall remain the sole responsibility of the relevant manufacturer. BCR don't recommend use of spray adhesives and double sided tapes. If you have any queries regarding adhesives, please contact the adhesive manufacturer directly.

BCR



BAHRAIN DISTRIBUTOR:

ALLIED GULF CONSTRUCTION SERVICES
info@alliedgulf.me | www.alliedgulf.me | +973-17791317

 /agcs.bahrain


BCR Ltd. UK[®]
TECHNICAL DATA SHEET
BCR ALUMINIUM SKIRTING



ber

The legendary

BCR ALUMINIUM SKIRTING

DISCRIPTION

BCR Aluminium skirting for protection and decoration between wall & floor.
Aluminium skirting is extruded from 6063 grade aluminium with grey anodised finished.
Extruded aluminium skirting gives dimensional stability precise gauging and uniform height.
Asthetic flooring designs are enhanced by using aluminium skirting.
Aluminium sit on skirting are neat, clean, finish and easily cleaned, used for retail areas and offices.
Available in 2.5 mtr length with connectors for all type of joints.

FIXING


With liquid nail adhesive.

COLOUR

Anodisation available in silver, gold, black and bronze.

SIZES

50 mm, 80 mm & 100 mm.

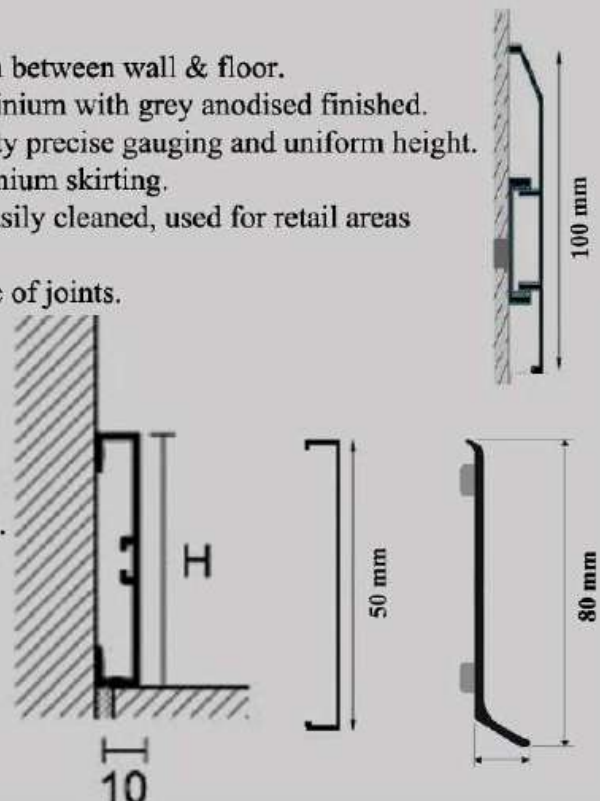

BAHRAIN DISTRIBUTOR:

ALLIED GULF CONSTRUCTION SERVICES
info@alliedgulf.me | www.alliedgulf.me | +973-17791317

/agcs.bahrain