




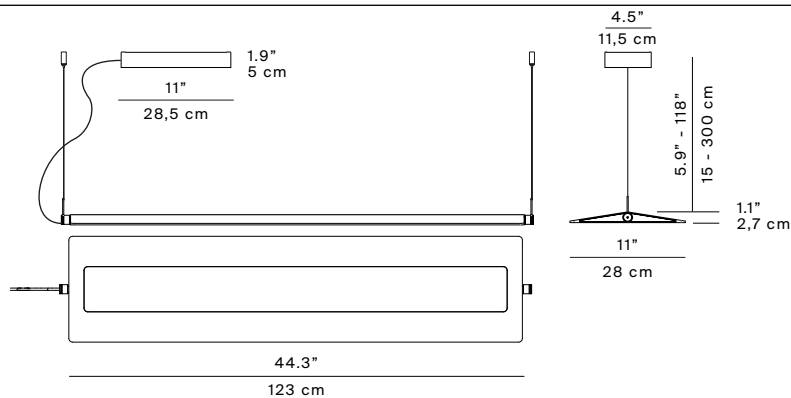

Fienile Suspension Lamp

Fienile, a table lamp inspired by the image of simple rural haylofts in Norway, featuring a low pitched roof and central/lateral walls in satin-finish anodized aluminium. A work of micro-architecture that projects soft, warm light from above onto a lower surface, giving rise to unusual compositions of brightness and shadow. The light slides along the lateral walls with a wall-washer effect, created by the LED sources with dimmers, by means of a touch function. The Fienile family also includes an a suspension lamp version.

D98SC1/D98SW1
suspension
dimmable push/DALI
220-240V~ 50/60 Hz
Product use: indoor




Light source	D98=W1	LED 19W (*) 2700K, CRI 90
	D98S	LED 46W (only source) or 52W (system) (*) 2700K or 3000K CRI 90
Rating system	D98=W1	220-240V ~ 50/60Hz, 19W
	D98SC1/D98SW1 D98SC2/D98SW2/D98SC3, D98SW3/ D98SC4/D98SW4	220-240 V ~ 50/60 Hz, 52W 24Vdc SELV, 46W
Materials	Table/Floor: aluminium structure and polycarbonate screen Suspension: aluminium structure and PMMA screen	
Structure anodized finishes indoor	 Prosecco	
Structure painted finishes suspension	 Dark grey	White




Reference code	D98=W1	1D980=W10028
	D98SC1	1D980SC10005 1D980SC10002
	D98SW1	1D980SW10005 1D980SW10002
	D98SC2	1D980SC20005 1D980SC20002
	D98SC3	1D980SC30005 1D980SC30002
	D98SW3	1D980SW30005 1D980SW30002
	D98SC4	1D980SC40005 1D980SC40002
	(*) Power consumption by device	D98SW4

Multiple configurations scheme


- A** D98SC2 3000K
D98SW2 2700K
- B** D98SC3 3000K
D98SW3 2700K
- C** D98SC4 3000K
D98SW4 2700K

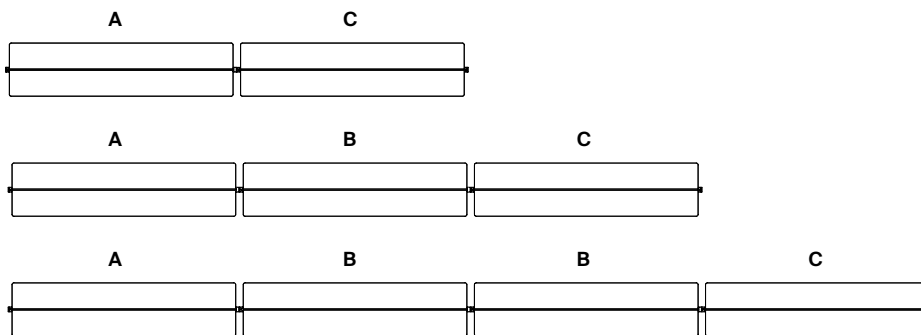


A + C

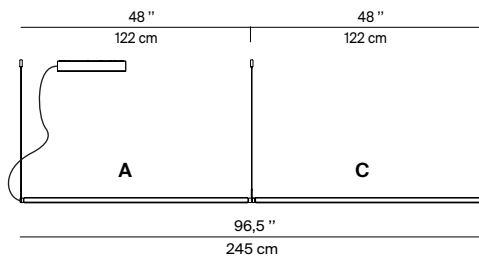

A + B + C

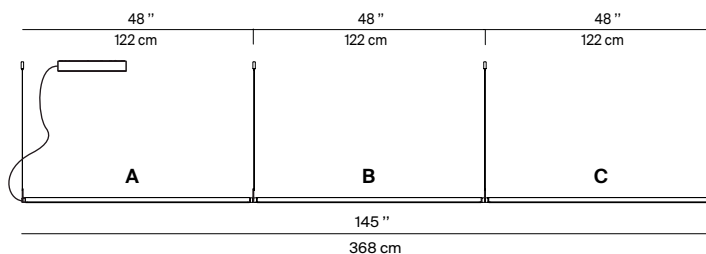

A + B + B + C

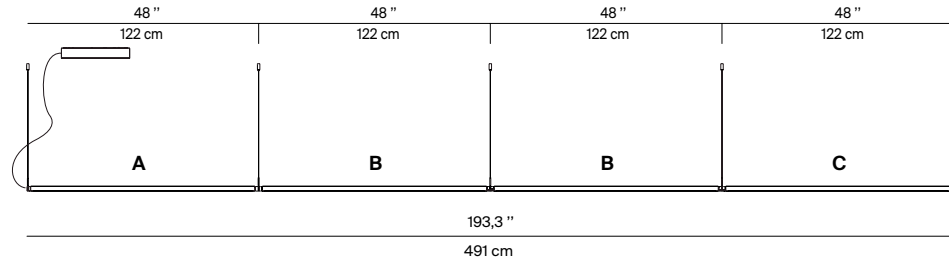

D98/4
ceiling rose
from 2 to 4 bodies
max 212W
220-240V ~ 50/60Hz

