

Unmatched in quality and beauty, Forms+Surfaces is the world's premiere resource for **Stainless Steel** sheet goods and related products. You'll find a wide variety of finishes and patterns with limitless design options.

## PRODUCT FEATURES

- Suitable for interior and select exterior applications.
- Finishes include a variety of High-Durability options—work-hardened surfaces that have enhanced resistance to abrasion and wear.
- Products are manufactured to specification and provided cut to size and ready to install.

#### MATERIAL DESCRIPTION

Stainless steel selections are defined by four basic parameters that are key to product specification:

MATERIAL	FINISH	PATTERN	TREATMENT
Choose a metal; in this case, stainless steel.	A variety of distinctive finishes are available including standard and High-Durability options.  See page 2 for details.	Patterns are optional. The pattern will be applied to the metal/finish combination you have selected. Standard Impression and Eco-Etch patterns are available. Custom patterns can also be requested.  See page 3-5 for details.	Ceramiloc+ treatment is an invisible, protective treatment that significantly increases the fingerprint resistance and maintenance ease of stainless steel.  Ceramiloc+ is available with any finish and pattern that does not incorporate Mirror finish. Additional details can be found in the Ceramiloc+ Product Data Sheet on our website.

#### PRODUCTS & APPLICATIONS

F+S SYSTEMS	SHEET GOODS
LEVELr Wall Panel & Column System LEVELe Wall Panel & Column System LEVELc Column System LEVELr Elevator Interiors	Includes our full line of stainless steel materials in standard sheet sizes or sheared to your specifications. Edge returns and many other add-on features are available.
	Standard sheet sizes:
LEVELE Elevator Interiors     LEVELe-2000 Elevator Interiors	48" x 96" (1219 mm x 2438 mm)     48" x 120" (1219 mm x 3048 mm)
LEVELc-1000 Elevator Interiors	Standard sheet thickness:
<ul><li> Elevator Ceilings</li><li> Elevator Door Skins</li></ul>	<ul> <li>0.032" (0.8 mm), approx weight 1.6 lbs./sq. ft (7.8 kg/sq. m)</li> <li>0.063" (1.5 mm), approx weight 2.5 lbs./sq. ft (12.2 kg/ sq. m)</li> </ul>
	Please see page 6-7 for more information.

## SHEET GOODS HANDLING

All stainless steel supplied as sheet goods and in our systems products comes with a protective film for added protection during transportation, machining and installation. Even with the protective film, care should be taken while handling the product. We recommended leaving the film on during installation. If using a brake press to bend sheets, we recommended using a die protective film such as Tuff Brake during the machining process. Care should be taken while handling the product.

### STAINLESS STEEL CHARACTERISTICS

FIRE RATING	ROUTINE MAINTENANCE
Stainless Steel is inherently non-	Fingerprints, smudges and more persistent dirt can be removed by using a 1:10 dilution of Dawn® detergent and warm water. After
combustible and generally considered to	cleaning, the surface should be rinsed with water to prevent streaking and dried with a clean microfiber towel. Do not use harsh
be NFPA and IBC Class A fire rated and	abrasives, acids or chlorine-based cleaners or cleaning tools containing carbon steel, such as steel wool or wire brushes. Additional
UBC Class 1 fire rated.	details can be found in the Architectural Materials Care & Maintenance document on our website.



#### STANDARD FINISH OPTIONS

Stainless steel is available in a variety of distinctive finishes including standard and High-Durability options. High-Durability finishes—designated by the "HD" logo below—are manufactured in a process that creates a work-hardened surface with enhanced resistance to abrasion and wear.

All stainless steel surfaces, including those with "non-directional" finishes like Mirror and Diamond, have at least a subtle directional grain that is inherent to the finishing process. Directionality is indicated by arrows on the protective film applied to each stainless steel sheet. For installation, it's your responsibility to align the sheets directionally; otherwise, reflectivity and appearance may be inconsistent. When stainless steel is used in F+S Systems, grain direction will be indicated on the F+S supplied drawings that accompany each order.



Note: Because different computers will render colors and textures differently, actual finishes may vary from those shown.



#### PATTERN OPTIONS

Patterns are optional applied designs that add visual interest and expanded customization potential to stainless steel surfaces. From a functional standpoint, patterns pick up where metals and finishes leave off. Forms+Surfaces stainless steel patterns are grouped into two categories: Impression and Eco-Etch.

## STANDARD IMPRESSION™ PATTERNS

Forms+Surfaces proprietary manufacturing capabilities include large-scale stamping equipment that can apply unique, full-press patterns across an entire sheet of material using a single tool. The result is a series of beautiful, high-relief patterns that add visual impact, enhanced durability and a rich, tactile feel. Some Impression patterns are also available in other materials such as Fused Metal® and our exclusive Bonded Quartz and Bonded Metal®, making it easy to carry a design theme throughout an installation in a variety of materials.





CHARDONNAY™




DALLAS™




DENVER™




DUNETM




KALAHARI™



CIRCLE



SQUARE



 $\mathsf{TEARDROP^{\mathsf{TM}}}$ 



TECH™




#### STANDARD ECO-ETCH® PATTERNS

Beautiful etched designs are applied to stainless steel using an advanced photolithographic bead-blasting system instead of acids or other harmful chemicals. Advantages of the Eco-Etch process include:


SIZE	SPEED	CONSISTENCY	ECOLOGICALLY RESPONSIBLE
The largest physical etching system in North America, our equipment can handle materials up to 2 m x 6 m.	The physical etching process can be completed in a fraction of the time required for traditional chemical etching.	Our proprietary computer-controlled system ensures an even blast pressure and a consistent finish, even on the largest	Because our Eco-Etch is physically applied, it does not require etching acid or other harmful chemicals and no toxic waste is
Standard sheet sizes of 48" x 96" and 48" x 120" and standard sheet thicknesses of 0.8 mm and 1.5 mm are available.		surfaces.	generated. The beads used in the process are contained within a closed chamber; used beads are recycled and returned to the process for reuse.

Standard designs include both overall and full-sheet patterns. Eco-Etch Elevator Door Skins also come in their own range of patterns optimized for door face applications. Please note that our standard patterns are only starting points; the flexibility and speed of our Eco-Etch system allow a wealth of design options with artwork supplied by the specifier or developed by Forms+Surfaces.

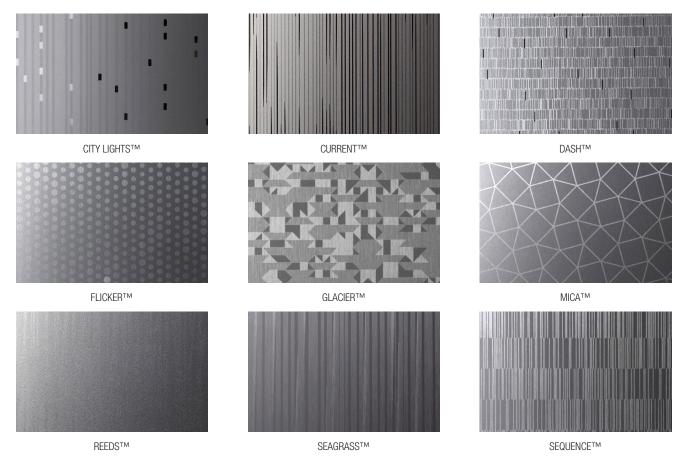



## **ECO-ETCH® PATTERNS, CONTINUED**

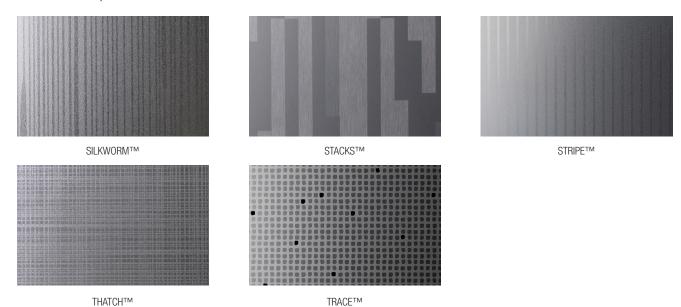

Usage rights, permissions, and/or copyrights for all submitted artwork are the responsibility of the submitting party. Forms+Surfaces is not responsible for obtaining or verifying these rights or permissions and cannot be held liable for conflicts of rights tied to submitted artwork.



## FINISH & PATTERN COMBINATIONS

PATTERN		STAINLESS STEEL FINISHES*						
		SANDSTONE ®	SEASTONE 🕮	LINEN 🐵	DIAMOND 69	MIST	MIRROR	SATIN
	FLAT (no pattern)	•	•	•	•	•	•	•
IMPRESSION	CHAMPAGNE	•	•	•	•	•	•	•
	CHARDONNAY	•	•	•	•	•	•	•
	DALLAS	•	•	•	•	•	•	•
	DENVER	•	•	•	•	•	•	•
	DUNE	•	•	•	•	•	•	•
	KALAHARI	•	•	•	•	•	•	•
≥	CIRCLE	•	•	•	•	•	•	•
	SQUARE	•	•	•	•	•	•	•
	TEARDROP	•	•	•	•	•	•	•
	TECH	•	•	•	•	•	•	•
	CITY LIGHTS		•				•	•
	CURRENT		•				•	•
	DASH		•				•	•
	FLICKER		•				•	•
	GLACIER		•				•	•
	MICA		•				•	•
공	REEDS		•				•	•
ECO-ETCH	SEAGRASS		•				•	•
	SEQUENCE		•				•	•
	SILKWORK		•				•	•
	STACKS		•				•	•
	STRIPE		•				•	•
	THATCH		•				•	•
	TRACE		•				•	•
	CUSTOM	•	•	•			•	•

<sup>\* ®</sup> High-Durability finishes are not available in 48" x 96" at the 1.5 mm thickness.



#### MATERIAL SPECIFICATIONS

The chart below shows thickness and sheet size dimensions for all stainless steel patterns. Patterns may be specified in any size up to the maximum indicated in the chart.

PATTERN		SHEET THICKNESS		SHEE	PATTERN HEIGHT		
FLAT (no pattern)		0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	CHAMPAGNE	0.032" (0.8 mm)	N/A	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.147" (3.7 mm)	
	CHARDONNAY	0.032" (0.8 mm)	N/A	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.147" (3.7 mm)	
	DALLAS (H)	0.032" (0.8 mm)	N/A	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.0625" (1.6 mm)	
	DALLAS (V)	0.032" (0.8 mm)	N/A	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.0625" (1.6 mm)	
Z	DENVER (H)	0.032" (0.8 mm)	N/A	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.053" (1.3 mm)	
IMPRESSION	DENVER (V)	0.032" (0.8 mm)	N/A	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.053" (1.3 mm)	
1 2 2	DUNE	0.032" (0.8 mm)	N/A	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.087" (2.2 mm)	
≧	KALAHARI	0.032" (0.8 mm)	N/A	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.106" (2.7 mm)	
	CIRCLE	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.08" (2 mm)	
	SQUARE	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.06" (1.5 mm)	
	TEARDROP	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.134" (3.4 mm)	
	TECH	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	0.075" (1.9 mm)	
	CITY LIGHTS	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	CURRENT	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	Dash	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	FLICKER	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	GLACIER	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
_	MICA	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
есо-етсн	REEDS	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
8	SEAGRASS	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
-	SEQUENCE	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	SILKWORK	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	STACKS	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	STRIPE	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	THATCH	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	
	TRACE	0.032" (0.8 mm)	0.063" (1.5 mm)	48" x 96" (1219 mm x 2438 mm)	48" x 120" (1219 mm x 3048 mm)	N/A	

# **CUSTOM PATTERNS**

As the international leader in high-quality stainless steel, Forms+Surfaces is always willing to consider custom pattern variations and modifications to meet specific project needs. Please contact us to discuss your requirements.

## **ENVIRONMENTAL CONSIDERATIONS**

Please refer to the Stainless Steel Product Environmental Data Sheet for detailed environmental impact information.

## **HOW TO SPECIFY**

To order please indicate finish, pattern and quantity.